


04/26/00



JCS20 U.S. P.

4-27-00

A

## LAW OFFICES

LERNER, DAVID, LITTENBERG, KRUMHOLZ &amp; MENTLIK, LLP

600 SOUTH AVENUE WEST

WESTFIELD, NEW JERSEY 07090-1497

(908) 654-5000

FAX (908) 654-7866

www.idlkm.com

PATENTS, TRADEMARKS AND COPYRIGHTS

April 26, 2000

JOHN P. MALDIJIAN  
 THOMAS M. PALISI  
 STEPHEN F. ROTH  
 KIMBERLY V. PERRY  
 JASON I. GARIBEL  
 RENEE M. ROBESON  
 BRIAN K. JOHNSON  
 LYNNE A. BORCHERS  
 PETER A. CICALA  
 MICHAEL J. DOHERTY  
 MICHAEL J. WALLACE, JR.  
 MATTHEW B. DENNER  
 ROBERT H. CLAUSSON  
 J. KIRKLAND DOUGLASS  
 ROBERT J. SCHEFFEL

OF COUNSEL  
 LAWRENCE I. LERNER  
 DANIEL H. BOBIS  
 RAYMOND W. AUGUSTIN  
 HARVEY L. COHEN  
 JEFFREY S. DICKEY

\*NORTH CAROLINA BAR ONLY  
 \*NEW YORK BAR ONLY  
 AND DISTRICT OF  
 COLUMBIA BARS ONLY

10715 S. N. P. 10  
 09/586787  
 04/26/00

BOX PATENT APPLICATION  
 Assistant Commissioner For Patents  
 Washington, D.C. 20231

File No.: SONYJP 3.0-114  
 Inventor(s): Kishitaka et al.  
 Title: BROADCAST RECEIVER, CONTROL METHOD THEREFOR, AND PROGRAM

Dear Sir:

Enclosed herewith please find the following documents in the above-identified application for Letters Patent of the United States:

1	Pages of Abstract	Unexecuted Declaration (executed Declaration to follow)
7	Pages of Specification	One (1) return-addressed postcard
15	Number of Claims	<u>PLEASE PROVIDE FILING DATE AND SERIAL NUMBER</u>
2	Sheets of Drawings <input checked="" type="checkbox"/> A4 <input type="checkbox"/> 11"	

Please charge Deposit Account No. 12-1095 in the amount of \$690.00, calculated as follows:

Basic Fee		\$ 690.00
Additional Fees:		
Total number of claims (including multiple dependent claims):	15	
Total number of claims in excess of 20:	0 x \$18	0.00
Number of independent claims:	3	
Number of independent claims minus 3:	0 x \$78	0.00
Fee for multiple dependent claim(s) (\$260)		0.00

TOTAL FILING FEE

\$ 690.00

CONVENTION DATE: April 28, 1999 for Japanese Appln. S.N. P11-122648 is claimed.  
 Priority Document: ☒ Enclosed ☐ Will follow

In the event the actual fee is greater than the payment authorized above, the Patent Office is authorized to charge any deficiency to our Deposit Account No. 12-1095.

Respectfully submitted,

LERNER, DAVID, LITTENBERG,  
 KRUMHOLZ & MENTLIK, LLP

ROBERT B. COHEN

Reg. No. 32,768

LB (LBUNEX) 98022

EXPRESS MAIL LABEL NUMBER: EM480534285US

500 P 07 20

- 1 -

## BROADCAST RECEIVER, CONTROL METHOD THEREFOR, AND PROGRAM

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to broadcast receivers, control methods therefor, and programs, and in particular, to a broadcast receiver, a control method therefor, and a program in which, in a set-top box (STB) or the like, a first-in first-out (FIFO) buffer area, required for separating input transport stream data, can be optimized (minimized in size) in accordance with the bit rate of the input transport stream data.

#### 2. Description of the Related Art

In STBs, etc., processing that separates multiplexed transport stream data into various types of data (such as video data and audio data) is performed by hardware. Accordingly, the FIFO buffer (fixed to a size determined by the maximum bit rate of input transport stream data), required to temporarily store input transport stream data, is realized as part of the hardware.

The bit rate of the input transport stream data differs depending on the country, the broadcaster, etc. Accordingly, after using the hardware to determine the design, as described above, when an STB for another destination or another broadcaster is developed, a problem arises in that

0053837 282560

since the bit rates of the input transport stream data differ, the hardware design must be substantially modified to achieve optimal size (area) so as to prevent the input transport stream data from overflowing.

#### SUMMARY OF THE INVENTION

Accordingly, objects of the present invention are to provide a broadcast receiver and a control method therefor in which, when the bit rate of input transport stream data is changed, an FIFO buffer area (size) is optimized (minimized) without changing the hardware design, and to provide a program for the receiver.

To this end, according to an aspect of the present invention, the foregoing objects are achieved through provision of a broadcast receiver for separating multiplexed transport stream data. The broadcast receiver includes a receiving unit for receiving the multiplexed transport stream data, a memory for storing the received transport stream data, a processing unit which determines an optimal buffer size in accordance with a bit rate of the transport stream data received by the receiving unit and which reserves, in the memory, a storage area having the determined size, and a demultiplexer for performing separation of a transport packet by using the reserved storage area.

According to another aspect of the present invention, the foregoing objects are achieved through provision of a control method for a broadcast receiver for receiving multiplexed transport stream data, for storing the received transport stream data in a memory, and for separating the desired transport packet from the stored transport stream data. The control method includes the steps of determining an optimal buffer size in accordance with a bit rate of the received transport stream data, and reserving, in the memory, a storage area having the determined size. The reserved storage area is used to perform separation of the transport packet.

According to a further aspect of the present invention, the foregoing objects are achieved through provision of a program stored in a storage medium which is executed by a control processor in a broadcast receiver for receiving multiplexed transport stream data, for storing the received transport stream data in a memory, and for separating the desired transport packet from the stored transport stream data. The program includes the steps of determining an optimal buffer size in accordance with a bit rate of the received transport stream data, and reserving, in the memory, a storage area having the determined size.

BRIEF DESCRIPTION OF THE DRAWINGS

00556787.042500

Fig. 1 is a block diagram showing the structure of an STB 1 according to an embodiment of the present invention;

Fig. 2 is an illustration of an example of a main memory 14 shown in Fig. 1; and

Fig. 3 is a flowchart illustrating a process performed when a control unit 13 shown in Fig. 1 changes the buffer size based on the bit rate of transport stream data.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 shows the structure of an STB 1 according to an embodiment of the present invention.

A user uses an input unit 11 to perform the desired operations (e.g., the switching-on and resetting of the main power, etc.). The input unit 11 supplies an operation signal to a control unit 13 via a bus 17.

A receiving unit 12 receives externally-supplied multiplexed transport stream data, and supplies the received transport stream data to a main memory 14 via the bus 17. The receiving unit 12 includes a tuner, a decoding circuit, and a correcting circuit.

The main memory 14 includes a program area 21 and a FIFO buffer 22, as shown in Fig. 2. The program area 21 stores a program in which processing to be performed when the STB 1 is booted (the switching-on or resetting of the main power) is described. In the program, a value of the

00553737-042500

bit rate of the transport stream data to be input to the receiving unit 12 is described at a predetermined position, and the value of the bit rate can be rewritten as required. Accordingly, when the value of the bit rate to be input is changed, it is only required that the described value of the bit rate be rewritten. The FIFO buffer area 22 temporarily stores the transport stream data supplied from the receiving unit 12. The optimal size (area) of the FIFO buffer area 22 is determined based on the result of arithmetic operation by the control unit 13 (described below).

When the control unit 13 is supplied with the operation signal (a main-power switching-on signal or a reset signal) from the input unit 12, it reads, from the program area 21 of the main memory 14, the bit-rate value of the transport stream data stored beforehand. The control unit 13 computes the optimal size of the FIFO buffer area 22, based on the read bit-rate value, and reserves, in the main memory 14, the FIFO buffer area 22 based on a result of the computation. The transport stream data from the receiving unit 12 is supplied and stored in the FIFO buffer area 22 reserved in the main memory 14. In view of the cost of memory, it is advantageous to set the optimal size of the FIFO buffer area 22 to the minimum necessary value which will prevent the stream data from overflowing.

A demultiplexer unit 15 is supplied with the transport

stream data from the FIFO buffer area 22 of the main memory 14. The demultiplexer unit 15 separates the supplied transport stream data into various types of data (e.g., video data, audio data, etc.), and supplies the separated data to a decoding unit 16 via the bus 17.

Next, a process performed when the control unit 13 determines the optimal size of the FIFO buffer area 22 based on the bit-rate value of the transport stream data is described with reference to the flowchart shown in Fig. 3.

In step S11, when the user switches on or resets the main power by operating the input unit 11, the operation signal (main-power switching-on signal or reset signal) is supplied to the control unit 13 via the bus 17.

In step S12, the control unit 13 reads, via the bus 17, the bit-rate value of the transport stream data stored beforehand in the program area 21 of the main memory 14.

In step S13, the control unit 13 computes, based on the read bit-rate value, the optimal size of the FIFO buffer area 22, and confirms it.

In step S14, the control unit 13 reserves, based on a result of the computation in step S13, the FIFO buffer area 22 in the main memory 14, and the process is terminated.

In the foregoing description, the case where the value of a bit rate of transport stream data is described beforehand in a program is described. By way of example, by

providing a detector for detecting an input bit rate, an optimal FIFO buffer size may be determined by performing the above-described computation based on the value of the bit rate output from the detector.

In the foregoing description, the main memory 14 is used in a form in which it is divided into the program area and the FIFO buffer area. However, a memory for storing a program may be provided separately from the main memory 14. For example, a rewritable nonvolatile flash memory may be used as the memory for storing a program, and a nonvolatile RAM may be used as the memory for the FIFO buffer.

In the present invention, the types of provision media for providing the user with a computer program executing the above-described process include not only information recording media such as magnetic disks and CD-ROMs but also network-based transmission media such as the Internet and digital satellite.

As described above, according to the present invention, based on the bit rate of transport stream data, an optimal buffer size is computed, and based on the result of the computation, the buffer area is changed, whereby memory can be effectively used.

0955787 042500



WHAT IS CLAIMED IS:

1. A broadcast receiver for separating multiplexed transport stream data, said broadcast receiver comprising:
  - a receiving unit for receiving the multiplexed transport stream data;
  - a memory for storing the received transport stream data;
  - a processing unit which determines an optimal buffer size in accordance with a bit rate of the transport stream data received by said receiving unit and which reserves, in said memory, a storage area having the determined size; and
  - a demultiplexer for performing separation processing of transport packets by using the reserved storage area.
2. A broadcast receiver according to Claim 1, wherein the optimal buffer size is described beforehand in a program to be executed by said processing unit.
3. A broadcast receiver according to Claim 2, wherein the program is executed when the main power of the receiver is switched on.
4. A broadcast receiver according to Claim 2, wherein the program is prestored in said memory.

0050707: 012600

5. A broadcast receiver according to Claim 2, wherein the program is stored in a nonvolatile memory.

6. A broadcast receiver according to Claim 1, wherein the optimal buffer size is determined by detecting the bit rate of the received transport stream data.

7. A control method for a broadcast receiver for receiving multiplexed transport stream data, for storing the received transport stream data in a memory, and for separating the desired transport packet from the stored transport stream data, said control method comprising the steps of:

determining an optimal buffer size in accordance with a bit rate of the received transport stream data; and

reserving, in said memory, a storage area having the determined size;

wherein the reserved storage area is used to perform separation of the transport packet.

8. A control method according to Claim 7, wherein the optimal buffer size is described beforehand in a program to be executed by a control processor controlling said broadcast receiver.

00553733 042500

9. A control method according to Claim 8, wherein the program is executed by said control processor when the main power of the receiver is switched on.

10. A control method according to Claim 8, wherein the program is stored beforehand in said memory.

11. A control method according to Claim 8, wherein the program is stored in a nonvolatile memory.

12. A control method according to Claim 7, wherein the optimal buffer size is determined by detecting the bit rate of the received transport stream data.

13. A program stored in a storage medium, the program being executed by a control processor in a broadcast receiver for receiving multiplexed transport stream data, for storing the received transport stream data in a memory, and for separating the desired transport packet from the stored transport stream data,

the program including the steps of:  
determining an optimal buffer size in accordance with a bit rate of the received transport stream data; and  
reserving, in said memory, a storage area having the

009240 28285500

14. A program according to Claim 13, wherein the program is executed by said control processor when the main power of the receiver is switched on.

wherein the optimal buffer size is determined in accordance with the detected bit rate.

ABSTRACT OF THE DISCLOSURE

A broadcast receiver includes an input unit, a receiving unit, a control unit, a main memory, a demultiplexer unit, and a decoding unit. When a user switches on or resets the main power by operating the input unit, an operation signal (main-power switching-on signal or reset signal) is supplied to the control unit via a bus. The control unit reads, via the bus, the bit-rate value of transport stream data stored in a program area in a main memory. The control unit computes the optimal size of the FIFO buffer area based on the read bit-rate value and confirms it. The control unit reserves, in the main memory, the FIFO buffer area based on a result of the computation.

005587037 044300

FIG. 1

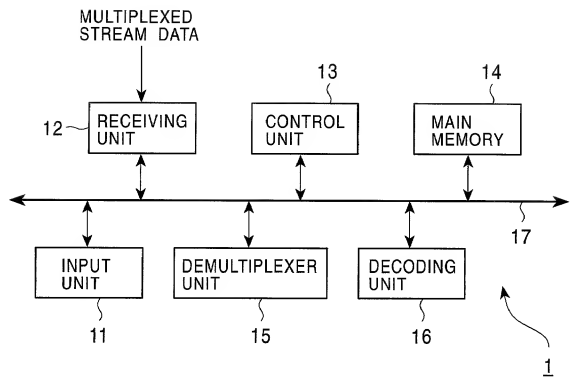


FIG. 2





FIG. 3

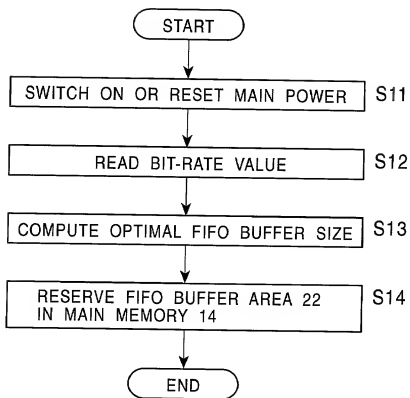

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

以下の氏名を発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

## BROADCAST RECEIVER, CONTROL METHOD THEREFOR, AND PROGRAM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約  
国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、  
内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of  
the above identified specification, including the claims, as  
amended by any amendment referred to above.

私は、連邦規則第37編第1章56項に定義されると  
おり、特許資格の有無について重要な情報を開示する義務が  
あることを認めます。

I acknowledge the duty to disclose information which is material to  
patentability as defined in Title 37, Code of Federal Regulations,  
Section 1.56.



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき、米国外の国の少なくとも一か国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者の特許出願についての外国優先権をここに主張するとともに、優先権を主張している。本出願の前に出願された特許または発明者の特許出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

## Prior Foreign Application(s)

Priority Not Claimed  
優先権主張なし

外国での先行出願  
P11-122648

Japan

28/4/1999

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

☐

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

☐

例：第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No)  
(出願番号)

(Filing Date)  
(出願日)

(Application No)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間に入手された、連邦規則法典第37編1.5条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No)  
(出願番号)

(Filing Date)  
(出願日)

(Status Patented, Pending, Abandoned)  
(現況：特許許可済、係属中、放棄済)

(Application No)  
(出願番号)

(Filing Date)  
(出願日)

(Status Patented, Pending, Abandoned)  
(現況：特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書で私が行う宣言が真実であり、かつ私の入手した情報と私の信じているところに基づく宣言が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Japanese Language Declaration

(日本語宣言書)

委任状。私は下記の発明者として、本出願に関する一切の  
手続を特許庁等に対して遂行する弁理士または代理人  
として、下記の者を指名いたします。(弁理士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

Customer No. 000530

書類送付先

Send Correspondence to:

Customer No. 000530

直接電話連絡先 (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Robert B. Cohen, Esq.  
(908) 654-5000

第一または第一発明者名

Full name of sole or first inventor

Yuriko Kishitaka

発明者の署名

日付

Inventor's signature

Date

住所

Residence

Saitama, Japan

国籍

Citizenship

Japan

郵便局

Post Office Address

c/o Sony Corporation, 7-35, Kitashinagawa 6-chome, Shinagawa-ku,  
Tokyo, Japan

第二共同発明者

Full name of second joint inventor if any

Koji Kashima

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence

Chiba, Japan

国籍

Citizenship

Japan

郵便局

Post Office Address

c/o Sony Corporation, 7-35, Kitashinagawa 6-chome, Shinagawa-ku,  
Tokyo, Japan

(第三以降の共同発明者についても同様に記載し、署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors.)